

BNX[®] 1235 Antioxidant & Thermal Stabilizer Blend

Introduction: BNX[®] 1235 is a synergistic blend of 40% BNX[®] 1010 and 60% Benefos[®] 1680. This blend of both a primary and secondary antioxidant provides excellent heat stability and antioxidation, with good compatibility with resins and excellent extraction resistance.


Material Description: Antioxidant and Thermal Stabilizer Blend

Chemical Name: 40% Tetrakis [Methylene-3 (3',5'-di-tert-butyl-4-hydroxyphenyl) propionate] methane (BNX[®] 1010); 60% Tris (2, 4- di-tert-butylphenyl) phosphite (Benefos[®] 1680)

Empirical Formula: C₇₃H₁₀₀O₁₂ (BNX[®] 1010)
C₄₂H₆₃O₃P (Benefos[®] 1680)

CAS #: 6683-19-8 (BNX[®] 1010)
31570-04-4 (Benefos[®] 1680)

Chemical Structure:

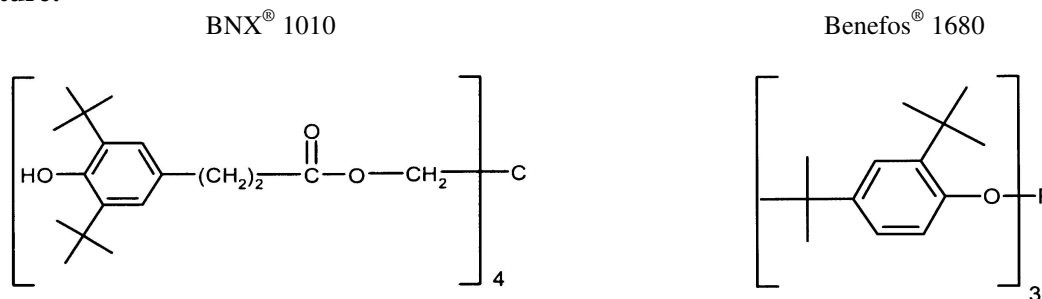

Physical

Properties:

Molecular Weight:	BNX [®] 1010: 1177.7; Benefos [®] 1680: 647
% BENEFOS 1680:	55-65%
% BNX 1010:	35-45%
Volatile Matter:	< 0.5% Max
Solubility (10 g/100ml Toluene):	Clear
% Transmittance:	425nm – 97% Min 500nm – 97% Min

Solubility at 20°C (g/100ml solvent):

Solvent	Solubility
Acetone	1%
Benzene	34%
Chloroform	36%
Ethyl Acetate	4%
Hexane	0.3%
Methanol	0.01%
Methylene Chloride	36%
Water	< 0.01%

Applications: BNX[®] 1235 is a convenient blend of both a primary and secondary antioxidant. This synergistic blend addresses a broad range of stabilization needs. The relatively high phenolic

antioxidant content provided by BNX[®] 1010 contributes synergistically to the polymer's stabilization and addresses applications requiring more long-term thermal stability by preventing thermo-oxidative degradation. The secondary antioxidant, Benefos[®] 1680, is an organophosphite of low volatility and particularly resistant to hydrolysis and provides protection to organic polymers which are prone to oxidation. This synergistic blend is used in polyolefins and olefin-copolymers such as polyethylene, polypropylene, polybutene and ethylene-vinyl acetate copolymers. This blend can also be used in other polymers such as engineering plastics, styrene homo- and copolymers, polyurethanes, elastomers, adhesives, and other organic substrates. BNX[®] 1235 can also be used in combination with light stabilizers to provide enhanced performance.

Advantages:

- Ease and convenience of compounding
- Maintenance of original melt flow
- Low color formation
- Improvement of long-term stability
- Low volatility
- Resistant to hydrolysis

Loading**Instructions:**

The loading data and results are based on laboratory work (and field testing) under controlled conditions and do not necessarily indicate the result that the buyer or user will attain. For this reason we strongly recommend testing of your own system under the actual conditions of processing and end-use prior to full scale testing. The recommended loading concentrations in polyolefins range between 0.1% and 0.25% depending on substrate and processing conditions. Exact loading must be determined by compositions of the specific polymer system.

Packaging:

BNX[®] 1235 is available in both powder and granular form in a 50 kg (110.2 pound) fiber drum, net weight, with an inner PE liner.

Storage:

This product may be stored up to two years in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

Toxicity & Safety:

This material is not intended for use in products for which prolonged contact with mucous membranes or abraded skin, or implantation within the human body is specially intended, unless the finished product has been tested in accordance with the Food and Drug Administration and/or other applicable safety testing requirements. Because of wide range of such potential uses, Mayzo, Inc. is not able to recommend this material as safe and effective for such uses and assumes no liability for any such uses. Read and understand the Material Safety Data Sheet before using or handling this product.

FDA Regulations:

The regulation status for BNX[®] 1235 is derived from the single components. Both BNX[®] 1010 and Benefos[®] 1680 are approved in food contact application; however, please consult the individual data sheets for more detailed information.

The information contained herein is believed to be reliable. However, Mayzo, Inc. makes no warranty, whether expressed or implied, including warranties of merchantability or of fitness for a particular purpose, for the product or products referred to herein. No statements or recommendations contained herein are to be constructed as inducements to infringe any relevant patent, now or hereafter existence. Under no circumstances shall Mayzo, Inc. be liable for incidental, consequential, or other damages from alleged negligence, breach of warranty, strict liability, or any other legal theory, arising out of the use of handling of the product or products referred to herein. The sole remedy of the buyer and sole liability of Mayzo, Inc. for any claims shall be limited to the buyers purchase price of the product which is subject of the claim or the amount actually paid for each product, whichever is less. Technical advice furnished by seller shall not constitute a warranty, which is expressly disclaimed, all such advice being given and accepted at the buyers risk.