

# MAYZO

**Benetex<sup>®</sup> OB PLUS**  
**Optical Brightener, Fluorescent Whitening Agent**



**Norcross, Georgia**  
Corporate Headquarters

6577 Peachtree Industrial Boulevard • Norcross, Georgia 30092

Phone:(770) 449-9066 • Fax:(770) 449-9070

[www.mayzo.com](http://www.mayzo.com)

## Benetex<sup>®</sup> OB Plus

### Optical Brightener, Fluorescent Whitening Agent

#### Introduction:

Benetex<sup>®</sup> OB Plus is a heat resistant, solvent soluble, chemically stable fluorescent whitener that provides brighter looking colors. It is used to offset the yellowness of a polymer and to yield a whiter appearance. Optical brighteners create brilliance by absorbing UV light, modifying the wavelength of the light and then emitting the light in a fluorescent fashion. Benetex<sup>®</sup> OB Plus can also be used as a tracer in various applications and as an optical brightener in thermoplastics, coatings, printing inks, dyes, man-made fibers, waxes, fats, and oils.

#### Material Description:

Fluorescent Whitening Agent

#### Chemical Name:

2,2'-(2,5-thiophenediyl)bis(5-tert-butylbenzoxazole)


#### Empirical Formula:

C<sub>26</sub>H<sub>26</sub>N<sub>2</sub>O<sub>2</sub>S

#### CAS #:

7128-64-5

#### Chemical Structure:




#### Physical Properties:

Appearance:	Yellowish, greenish crystalline powder
Molecular Weight:	431
Melting Range:	192 - 208°C
Flashpoint (Ignition):	662°F (Marcusson)
Ash:	0.1% Max
Assay:	99% Min
Volatile Matter:	< 0.3% Max
Solubility (1 g/100ml Chloroform):	Clear
% Transmittance:	450nm – 93% Min 500nm – 95% Min
Specific Gravity (20°C)	1.26 g/cm <sup>3</sup>
Vapor Pressure (20°C)	2.6 E-8 Pa
Decomposition Temperature	>350°C

#### Absorption Spectrum:

Extinction and Fluorescence Emission Curves (Active Ingredient in powdered form)

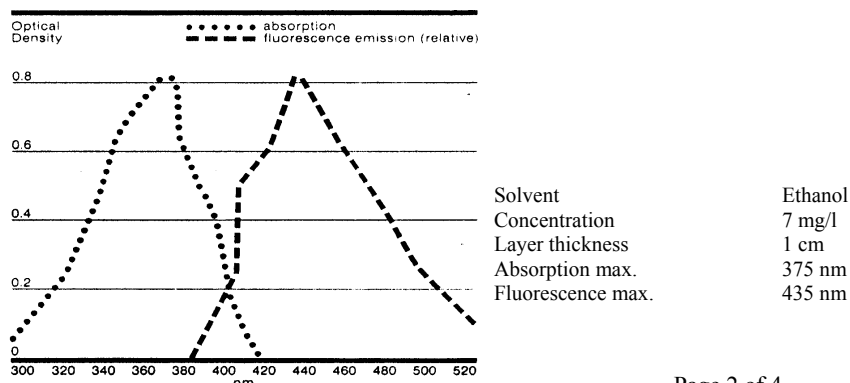

**Applications:**

**Thermoplastics** - Benetex<sup>®</sup> OB Plus can be used to impart excellent brightness to various thermoplastics, including: polyvinyl chloride, polyethylene, polypropylene, cellulose acetate, polystyrene, polycarbonate, acrylics, polyolefins, adhesives, polyurethane, linear polyester, and polyamides. This product is significantly more efficient than other optical brighteners.

**Coatings** - Benetex<sup>®</sup> OB Plus provides an excellent means to determine coverage of either conventional or UV cure coatings. Small amounts act as a tracer which, when viewed under a black light, indicate whether or not uniform coating coverage has been achieved. This is especially useful for clear coatings where coverage can be difficult to determine by conventional means. Benetex<sup>®</sup> OB Plus can also be used to offset the yellowness of coatings to yield a whiter appearance. Due to the additional processing of this material, the Benetex<sup>®</sup> OB Plus does not need to be additionally milled to improve particle size or uniformity.

**Printing Inks** - Benetex<sup>®</sup> OB Plus may be used in printing inks to facilitate the quick identification of security bonds, and also as a safeguard against forgeries (bank notes). Benetex<sup>®</sup> OB Plus may also be combined with dyes to produce particularly bright shades. The effect is especially pronounced in pastel shades. Due to the additional processing of this material, the Benetex<sup>®</sup> OB Plus does not need to be additionally milled to improve particle size or uniformity.

**Man-made fibers** - Benetex<sup>®</sup> OB Plus imparts a lightfast brightness with good textile fastness properties to both PVC and acetate fibers. This product is significantly more efficient than other optical brighteners.

**Main applications** - Include fibers, molded articles, films, sheets, clear lacquers, paints, printing inks, and synthetic leather.

**Advantages:**

- Does not require additional milling in coating and ink applications
- More easily dispersed than other optical brighteners
- More efficient than other optical brighteners
- Brilliant, bluish white effects that compensates for yellowing
- Good light fastness and low volatility
- Exceptional whitening properties
- Highly compatible with a wide range of organic substrates and solvents
- Excellent resistance to heat
- Useful as a tracer in clear coatings
- In combination with dyes, produces particularly bright shades

**Loading****Instructions:**

The loading data and results are based on laboratory work (and field testing) under controlled conditions and do not necessarily indicate the result that the buyer or user will attain. For this reason we strongly recommend testing of your own system under the actual conditions of processing and end-use prior to full scale testing. The recommended loading concentrations in unpigmented polyolefins range between 0.0005 % and 0.0010% and the loading levels in other plastics range between 0.005% and 0.100% depending on substrate, processing conditions, and long-term stability requirements. Benetex<sup>®</sup> OB Plus can also be used alone or with a variety of blends including ultraviolet light absorbers (UVA). If Benetex<sup>®</sup> OB Plus is used in combination with an UVA the loading levels must be increased. Exact loading must be determined by compositions of the specific polymer system.

**Packaging:**

Benetex<sup>®</sup> OB Plus is available in powder form in a 50 lb fiber drum, net weight, with an inner PE liner. It is also available in a 3-lb plastic pail with an additional surcharge.

**Storage:** This product may be stored up to one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

**Toxicity & Safety:**

This material is not intended for use in products for which prolonged contact with mucous membranes or abraded skin, or implantation within the human body is specially intended, unless the finished product has been tested in accordance with the Food and Drug Administration and/or other applicable safety testing requirements. Because of wide range of such potential uses, Mayzo, Inc. is not able to recommend this material as safe and effective for such uses and assumes no liability for any such uses. Read and understand the Material Safety Data Sheet before using or handling this product.

FDA Regulations				
<u>Existing Regulations</u>	<u>Maximum Concentration</u>	<u>Thickness</u>	<u>Food Allowed</u>	<u>Temperatures Allowed</u>
Fluorescent whitening agent, 175.105, 178.3297 2,2'-(2,5-Thiophenediyl) bis [5-tert-butylbenzoxazole]				
Adhesives complying with 175.105	no restrictions	no restrictions	no restrictions	No restrictions
Olefin polymers complying with 177.1520(c), items 1.1, 1.2, or 1.3	0.05%	no restrictions	nonfat foods	250°F
	0.01%	no restrictions	no restrictions	250°F
Olefin polymers complying with 177.1520(c), items 2.1, 2.3, 3.1, 3.3, or 4	0.05%	no restrictions	nonfat foods and foods containing up to 8% alcohol	room temperature or below fill and storage
Polystyrene and rubber-modified polystyrene complying with 177.1640	0.05%	no restrictions	nonfat foods and foods containing up to 8% alcohol	room temperature or below fill and storage
Polyvinyl chloride	0.05%	no restrictions	nonfat foods and foods containing up to 8% alcohol	room temperature or below fill and storage
Polyoxymethylene homopolymer complying with 177.2480	0.01%	no restrictions	No restrictions	no restrictions
Polycarbonate resins complying with 177.1580	0.15%	no restrictions	non fatty, nonalcoholic foods	212°F

**The information contained herein is believed to be reliable. However, Mayzo, Inc. makes no warranty, whether expressed or implied, including warranties of merchantability or of fitness for a particular purpose, for the product or products referred to herein. No statements or recommendations contained herein are to be construed as inducements to infringe any relevant patent, now or hereafter existence. Under no circumstances shall Mayzo, Inc. be liable for incidental, consequential, or other damages from alleged negligence, breach of warranty, strict liability, or any other legal theory, arising out of the use of handling of the product or products referred to herein. The sole remedy of the buyer and sole liability of Mayzo, Inc. for any claims shall be limited to the buyers purchase price of the product which is subject of the claim or the amount actually paid for each product, whichever is less. Technical advice furnished by seller shall not constitute a warranty, which is expressly disclaimed, all such advice being given and accepted at the buyers risk.**