



Mayzo Makes It Possible

BNX[®] 1225


Antioxidant and Thermal Stabilizer Blend

Overview


BNX 1225 is a synergistic blend of the phenolic antioxidant BNX 1010 and the phosphite Benefos[®] 1680 in a 1:2 ratio. This blend of both a primary and a secondary antioxidant provides excellent heat stability and resistance to oxidation, with good compatibility with resins and low volatility.

Chemistry

Chemical Names:	BNX 1010 Benzenepropanoic acid, 3,5-bis(1,1-dimethylethyl)-4-hydroxy-, 1,1'- [2,2-bis[[3-[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]-1-oxopropoxy]methyl]-1,3-propanediyl] ester
	Benefos 1680 Phenol, 2,4-bis(1,1-dimethylethyl)-, 1,1',1''-phosphite
CAS Numbers:	BNX 1010 6683-19-8 Benefos 1680 31570-04-4
Chemical Structures:	BNX 1010

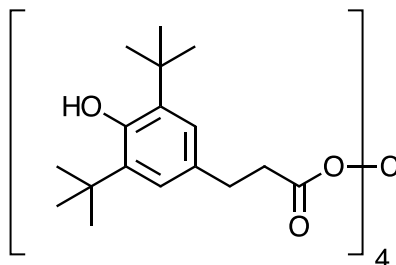

Benefos 1680



Typical Properties

Product Form:	Solid
Melting Range:	BNX 1010 110 – 125°C Benefos 1680 183 – 187°C
Molecular Weight:	BNX 1010 1177.6 g/mol Benefos 1680 646.9 g/mol

Solubility

Please refer to the product data sheets for BNX 1010 and Benefos 1680 for solubility information.

Applications

BNX 1225 is a convenient blend of both a primary and secondary antioxidant. This synergistic blend addresses a broad range of stabilization needs. It is ideal for use as a melt processing stabilizer in polyolefins such as polypropylene, polyethylene, polyolefin copolymers and blends, and TPO's. This product is also useful as an antioxidant and processing stabilizer for other materials as well, including adhesives, elastomers, polyurethanes, styrenic polymers, and engineering plastics.

Advantages

- Ease and convenience for compounding operations
- Provides excellent melt stability in a wide range of polyolefins
- Phosphite component features excellent hydrolytic stability
- Non-discoloring
- Low volatility at high processing temperatures
- Extensive FDA clearances

Guidelines for Use

Typical recommended loading concentrations range between 0.05% and 0.5%. BNX 1225 is also suitable for use in combination with light stabilizers, including hindered amine light stabilizers (HALS), UV absorbers, and benzoates. The exact formulation to be used is dependent on the substrate, performance requirements, and other factors, and should be determined by the user based on testing to simulate actual conditions of use. Please contact Mayzo for specific recommendations.

Storage

This product may be stored up to two years in a sealed container. Containers should be kept tightly closed when not in use and stored in a cool, dry place.

Safety

Please consult the Safety Data Sheet (SDS) prior to handling or using this product.

FDA Regulations

The components of BNX 1225 have extensive FDA clearances, including in adhesives, olefin polymers and copolymers, polystyrene (including rubber-modified polystyrene), lubricants, and many other applications. Please contact your Mayzo representative for complete details, including restrictions of use.

The information contained herein is believed to be reliable. However, Mayzo, Inc. makes no warranty, whether expressed or implied, including warranties of merchantability or of fitness for a particular purpose, for the product or products referred to herein. No statements or recommendations contained herein are to be constructed as inducements to infringe any relevant patent, now or hereafter existence. Under no circumstances shall Mayzo, Inc. be liable for incidental, consequential, or other damages from alleged negligence, breach of warranty, strict liability, or any other legal theory, arising out of the use of handling of the product or products referred to herein. The sole remedy of the buyer and sole liability of Mayzo, Inc. for any claims shall be limited to the buyers purchase price of the product which is subject of the claim or the amount actually paid for each product, whichever is less. Technical advice furnished by seller shall not constitute a warranty, which is expressly disclaimed, all such advice being given and accepted at the buyers risk.